

Infrared Sauna

- Intelligent Health Care
- Healthy Life

Wizzi saunas



907X Infrared Sauna

Installation & Owner's Manual

Please read this entire manual thoroughly before proceeding with the assembly.

CATALOGS

- 01 ● PRECAUTIONS
AND INSTRUCTION
- 02 ● INSTALLATION GUIDE
- 09 ● OTHER FUNCTIONS
- 10 ● CONTROL PANEL INSTRUCTION
- 11 ● SPECIFICATIONS

PRECAUTIONS AND INSTRUCTION

ATTENTION

Please read all instructions thoroughly before using.

Serious injury may result if ignore the following warning and instruction.

Basic precautions should always be followed when using this electrical equipment.

DANGER

To avoid the risk of causing burns, fire, electric shock, or other injuries:

- Connect the power cord to a properly grounded outlet.
- Using only for its intended use as described in this manual.
- Don't use accessories not recommended by the manufacturer.
- Please disconnect the power after using.
- Please keep the electrical cord away from heated surfaces.

If the sauna is faulty, the supply cord or plug is damaged, please stop using it immediately.

WARNINGS

- Don't stay longer than one hour.
- Don't put the sauna on a humid environment.
- Don't touch the heater directly with hands or body for a long time.
- Don't use any sharp tools on or near the heaters (severe damage may result).
- Placing the sauna on a flat surface.
- Unauthorized disassembly of the sauna is prohibited.
- People with health problems should consult a physician for prior to using the sauna. (Including acute diseases, malignant tumors, high blood pressure, heart disease, allergic dermatitis, pregnancy, etc.)
- This product is not intended for use by person (including children) with reduced physical, sensory or mental capabilities, or lack of adequate

experience knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

- Using a sauna after taking alcohol, drugs, or medication can lead to hyperthermia and increase the risk of death.
- If you are feeling uncomfortable, exit the sauna immediately and consult a doctor.
- Children should be supervised to ensure that they do not play with the appliance.

HYPERTHERMIA

Prolonged exposure in the sauna may cause hyperthermia. Hyperthermia occurs when body's core temperature rises above 98.6F. Symptoms of hyperthermia include a rise in body temperature, dizziness, lethargy, drowsiness, and fainting. The effects of hyperthermia may include:

- a) Failure to perceive heat / Unawareness of impending heat
- b) Failure to recognize the need to exit the sauna
- c) Fetal damage in pregnant women
- d) Physical inability to exit the sauna
- e) Unconsciousness

INSTALLATION GUIDE

Each panel is heavy, especially the top panel. Be careful to avoid injury when installing. This sauna requires at least 2 adults to complete assembly. The panels should be install in the following order:

Floor Panel → Rear Panel → Left Panel → Right Panel → Bench Support Panel → Bench Surface Panel → Pieces of Glass on the Left Side → Place the Front Glass → Door Glass Installation → Connect the wires → Set Screw

Step 1: Position the Floor Panel



(image1)

Place the floor panel on a flat surface. Before assembly, make sure the floor is flat so that you can maintain a comfortable subsequent installation. (image1)

Step 2: Position the Rear Right Panel



(image2)

Place the rear right panel in place so that the wooden strip at the bottom of the rear right panel is clamped to the floor panel. If your sauna is next to a wall, you can gently rest the rear right panel against the wall of your home. (image 2)

Step 3: Position the Rear Left Panel



(image3)



Place the rear left panel so that the batten at the bottom of the rear left panel is clamped to the baseboard. Note whether the hooks for the rear right panel and rear left panel sub-buttons are up or down.(image 3)

Step 4: Position the Right Side Panel



(image4)

Place the right side panel in place so that the wooden strip at the bottom of the right side panel is clamped to the floor panel. Pay attention to whether the hooks of the rear right panel and right side panel sub-button are up or down.

Step 5: Place the Left Side Panel



(image5)

Place the left side panel in place so that the wooden strip at the bottom of the left side panel is clamped to the floor panel. Pay attention to whether the hooks of the rear left panel and left side panel sub-button are up or down.

Step 6: Place the Bench Support Panel and Connect the wire behind


There are two bench support panels. Please place the longer bench support panel into the tenon of the big rear and left panels firstly, then place the another into the tenon of the longer support panel and right panel.(image6) Every two wires have corresponding unique interface shape, hear a click to indicate that the connection is ready.



(image 6)

Step 7: Place the Bench Surface Panel and Connect the wire behind

Place the Bench Surface panel and connect the wires behind (image7). Each two wires have corresponding unique interface shape, hear a click to indicate that the connection is completed.



(image7)

Step 8: Assembling the Two Small Pieces of Glass on the Left Side

Please assemble the two pieces of glass with the sealing strip first, you can use a rubber hammer to gently knock the sealing strip completely into the glass (image 8).

(if there is no suitable rubber hammer, you can use a plastic mineral water bottle to knock. **Note: No hard objects can be used.**)

Gently place the glass into the slots in the bottom panel and the left side panel.



(image 8)

Step 9: Assembling the Two Small Pieces of Glass on the Left Side(2)

Please open the screw package to fix the glass. After the glass is fixed, please install the seal on the other side of the glass.



Step 10: Place the Front Glass

Please install the front glass in the slots of the bottom and side panels, then open the screw package and secure the glass.



Step 11: Installation of Seals

Please open the front door to install the seal, taking care that the seal must be completely embedded in the glass.



Step 12: Connect the wires

Please install the top of the product and connect all wires.



(image 21)



(image 22)



(image 23)



(image 24)

Step 13: Door Handle Installation

Please put the screws into the holes of the door handle according to the (image 20) and lock the screws.



(image 20)

Step 14: Set Screw

Please fix the top six screw holes, (image 25) then fix the bottom two screw holes (image 26).



(image 25)




(image 26)

Step 15: Enjoy your Sauna


Congratulations, you have successfully assembled a sauna. Plug in the sauna, and enjoy your sauna time.



OTHER FUNCTIONS

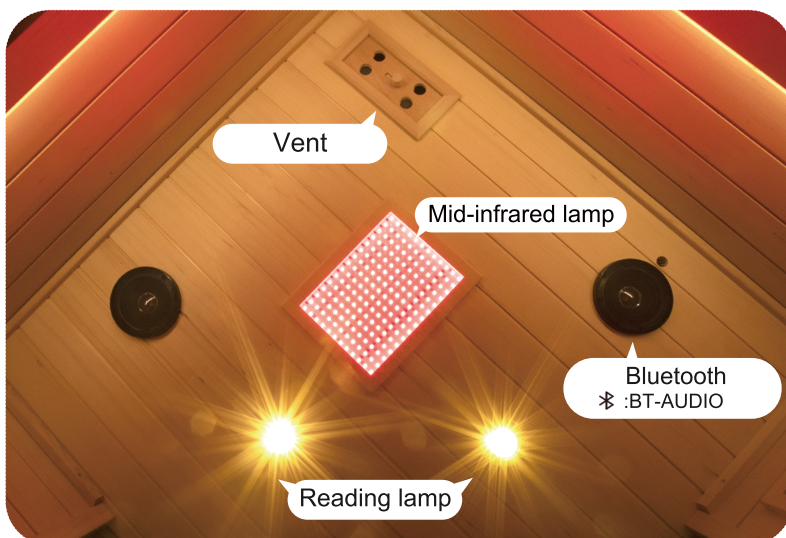

CONTROL PANEL INSTRUCTION

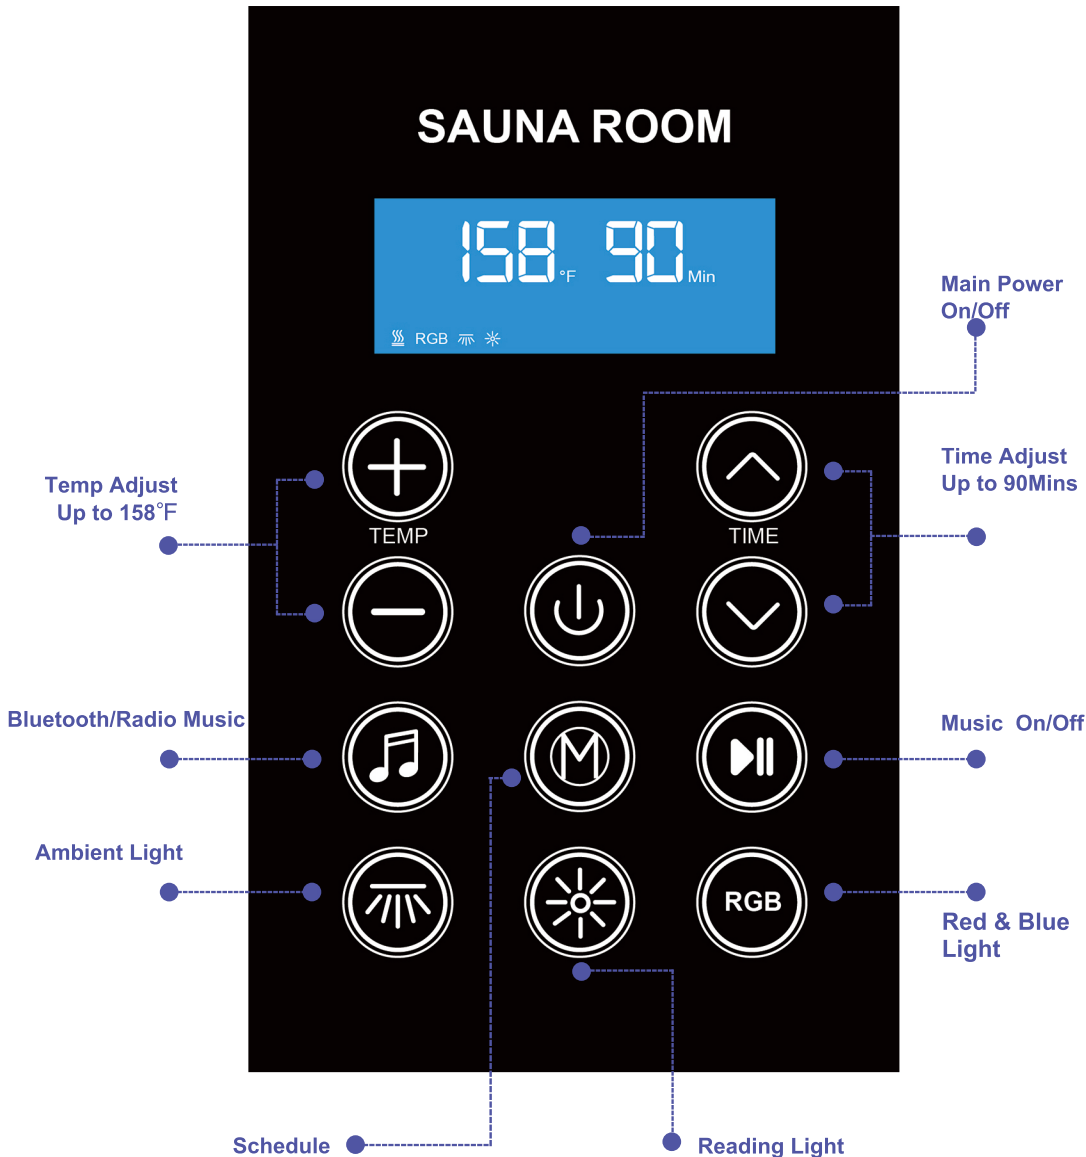


SPECIFICATIONS

Product Name	Far Infrared Sauna
Model	907X
Dimensions	47.36*47.36*75.40in
Voltage	110-120VAC
Plug Type	15 Amps
Wattage	1900 W
Number of Heaters	8 pcs
Raw Material	Hemlock/Red Cedar
Location	Indoor

RED & BLUE LIGHT THERAPY LAMP

We have built a multi-wavelength LED light therapy system into the interior, combining modern phototherapy with infrared sauna technology. Depending on your wellness needs, you can switch between two powerful therapy modes:

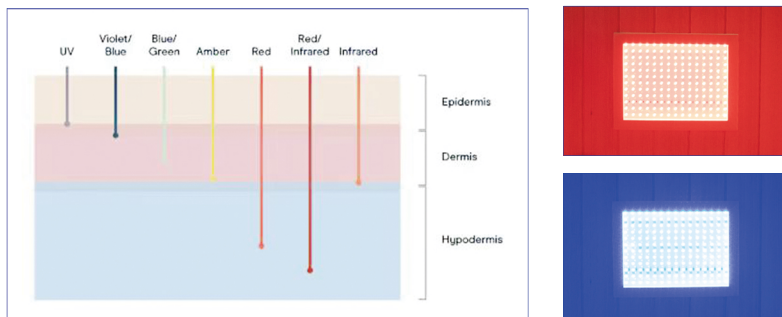

Red Light (660nm) + Near Infrared (850nm)


The 660nm red light helps support skin renewal and improves skin appearance, while the 850nm near infrared penetrates deeper into muscles and joints to help relieve soreness, fatigue, and physical stress. This mode is especially popular for post-workout recovery and full-body relaxation.

Best for: Deep recovery, skin rejuvenation, and muscle relaxation.

Blue Light (450nm) + Near Infrared (850nm)

The 450nm blue light helps target skin impurities and bacteria commonly associated with acne and irritation, while the 850nm near infrared continues to support deeper cellular wellness and recovery beneath the skin's surface. This combination promotes cleaner, healthier, and more revitalized skin.

Best for: Skin clarity, inflammation relief, and overall skin wellness.

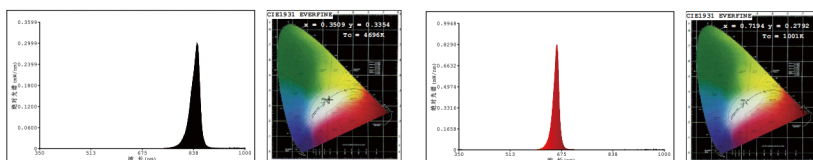

KEEP IN WELL CONDITION FOR SAUNA ROOM

- Place a large towel over the seat and baseboard before use to absorb excess sweat and prevent it from eroding the equipment.
 - In order to prevent colds during use, it is recommended that the temperature be gradually lowered until the body gradually adapts to room temperature before stepping out of the equipment.
 - If there is a lot of sweating after using the device, it is recommended to take a shower after 60 minutes, or use a room temperature wet towel to wipe the body after using the device, which is also an alternative to showering. It is also a good alternative to showering and is better for the skin.
 - After use, open the door and ventilate for about 10 minutes, during the ventilation process, the device can be turned off, and the residual temperature can also be used to evaporate the internal water vapor.
 - If there is sweat dripping onto the surface of the board or heating plate, etc., you can use a damp towel to wipe it in time to prevent discoloration and leaving stains, etc.
 - The door just has a magnetic suction device, can not prevent violent entry, please pay attention to children, the elderly, pets and other bad entry.
 - It is strictly prohibited to add locking devices to the door when using it, and it must be ensured that people can enter and exit conveniently at any time.
-

CONCENTRATE ON PROFESSIONAL SAUNA
